



- IEC 62053-22 Class 0.5S
- True RMS Measurements
- THD with 31st Ind. Harmonics
- Crest Factor and TDD
- Unbalance & Phase Angle
- TOU & Demands
- Max./Min. Log with Timestamps
- Modbus RTU, Modbus TCP, SNTP
- 9 User Programmable Setpoints
- Large, Backlit, 7-Segment LCD
- 12 Monthly Energy Log & SOE Log
- RS-485 & Ethernet Port
- 4xDI, 2xDO, 1xSS Pulse Output
- IP65 Enclosure with No Openings
- Standard Tropicalization
- Industrial Grade Components
- Extended Temperature
- Extended Warranty

Intelligent Multifunction Meter



The PMC-S963-E Intelligent Multifunction Meter is CET's latest offer for the low-cost digital power/energy metering market. Housed in a standard DIN form factor measuring 96x96x92mm, it is perfectly suited for industrial, commercial and utility applications. The PMC-S963-E features quality construction, multifunction measurements and a large, backlit, 7-Segment LCD that is easy to navigate and user friendly. Compliance with the IEC 62053-22 Class 0.5S Standard, it is a cost-effective replacement for analog instrumentation that is capable of displaying 3-phase measurements at once. It provides 4xDI, 2xDO, 1xSS Pulse Output and 1xUng Input for status monitoring, control and alarm applications. The standard RS-485 port and 10/100BaseT Ethernet port makes the PMC-S963-E a smart metering component of an intelligent, multifunction monitoring solution for any Energy Management System.

Typical Applications

- Industrial, Commercial and Utility Substation Metering
- Building, Factory and Process Automation
- Sub-metering and Cost Allocation
- Energy Management and Power Quality Monitoring

Features Summary

Ease of use

- Large, backlit, 7-segment LCD display with wide viewing angle
- Intuitive user interface
- LED indicators for Energy Pulsing and Communication activities
- Password protected setup via Front Panel or free PMC Setup software
- Easy installation with mounting clips, no tools required

Basic Measurements

- ULN, ULL per Phase and Average, and Ung
- Current per Phase and Average with calculated Neutral
- P, Q, S, PF per Phase and Total
- Total RMS kWh, kvarh Import/Export/Net/Total and kVAh Total
- Per-phase kWh, kvarh Import/Export
- Frequency

Advanced Measurements

- U and I THD, TOHD, TEHD, TH (RMS) and Individual Harmonics up to 31st
- Current TDD, TDD Odd, TDD Even and Crest Factor
- U and I Sequence, Unbalance and Phase Angle
- Fundamental U and I per Phase
- kvarh Q1-Q4
- P Present and Predicted Demands as well as Max. Demands with Timestamp for This Month & Last Month (or Since Last Reset & Before Last Reset)
- One TOU schedule providing
 - 4 Seasons
 - 4 Daily Profiles, each with 14 Periods in 15-minute interval
 - 4 Tariffs, each providing kWh Import
- 12 monthly recording of kWh/kvarh Import/Export/Total/Net, kVAh Total, kvarh Q1-Q4 as well as kWh Import per Tariff

Setpoints

- 9 user programmable setpoints with extensive list of monitoring parameters including Voltage, Current, Power, P Demand, Unbalance, Phase Reversal and THD, etc.
- Configurable thresholds, time delays and DO triggers

SOE Log

- 32 events time-stamped to $\pm 1\text{ms}$ resolution
- Setup changes, Setpoint and DI status changes and DO operations

Max./Min. Log

- Max./Min. Log with Timestamp for Real-time measurements such as Voltage, Current, Ung, Inc, Freq., P, Q, S, PF, Unbalance and THD
- Configurable for This Month & Last Month (or Since Last Reset & Before Last Reset)

Diagnostics

- Loss of Voltage/Current
- P Direction per Phase and Total
- Incorrect U & I Phase Sequence

Real-Time Clock

- Battery-backed Real-time Clock with 25ppm accuracy (<2s per day)

Inputs and Outputs

Digital Inputs

- 4 channels, volt free dry contact, 24VDC internally wetted
- 1000Hz sampling for status monitoring with programmable debounce
- Pulse counting with programmable weight for each channel for collecting WAGES (Water, Air, Gas, Electricity, Steam) information

Digital Outputs

- 2xForm A Mechanical Relay for alarming and general purpose control

Pulse Output

- 1xForm A Solid-State Relay for kWh and kvarh pulsing

Communications

RS-485

- Optically isolated RS-485 port at max. 38,400 bps
- Standard Modbus RTU

Ethernet Port

- 10/100BaseT Ethernet Port with RJ45 connector
- Protocols supported: Modbus TCP, SNMP
- Simultaneous client connections for 4xModbus TCP


System Integration

- Supported by CET's PecStar® iEMS
- Easy integration into other Automation, SCADA or BMS systems via Modbus RTU

Accuracy

Parameters	Accuracy	Resolution
Voltage	$\pm 0.2\%$	0.001V
Current	$\pm 0.2\%$	0.001A
Inc	$\pm 1.0\%$	0.001A
P, Q, S	$\pm 0.5\%$	0.001kx
kWh	IEC 62053-22 Class 0.5S	0.01kWh
kvarh	IEC 62053-23 Class 2	0.01kvarh
PF	$\pm 0.5\%$	0.001
Frequency	$\pm 0.02\text{Hz}$	0.01Hz
THD	IEC 61000-4-7 Class II	0.001%

Dimensions and Installation

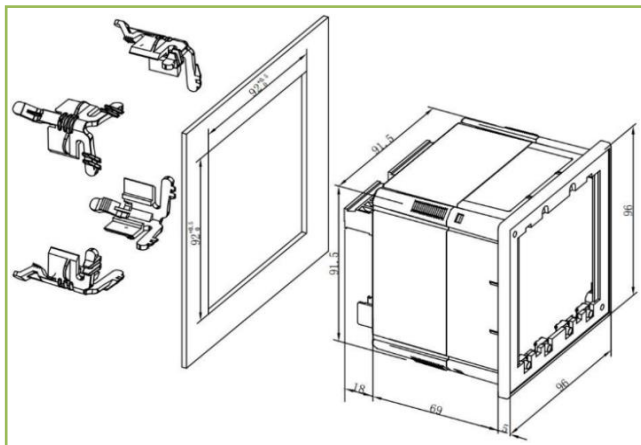

Designed For Reliability


Manufactured To Last

Voltage Inputs (V1, V2, V3, VN, VG)	
Standard Un	240ULN/415ULL
Range	20V to 1.2Un
Overload	1.2xUn continuous 2xUn for 1s
Burden	<0.02VA per phase @ 240ULN
Ung Measurement Range	0.1V to 40V
Measurement Category	CAT III up to 300V
Frequency	45-65Hz
Current Inputs (I11, I12, I21, I22, I31, I32)	
Standard In	5A (Optional 1A)
Range	0.1% to 120% In
Starting Current	0.1% In
Overload	1.2xIn continuous 10xIn for 1s
Burden	<0.25VA per phase @ 5A
Power Supply (L+, N-)	
Standard	95-250VAC/DC, $\pm 10\%$, 47-440Hz
Optional	20-60VDC
Burden	<2W
Overvoltage Category	OVC III up to 300V
Digital Inputs (DI1, DI2, DI3, DI4, DIC)	
Type	Dry contact, 24VDC internally wetted
Sampling	1000Hz
Hysteresis	1ms minimum
Digital Outputs (DO11, DO12, DO21, DO22)	
Type	Form A Mechanical Relay
Loading	5A @ 250VAC or 30VDC
Load Type	Resistive
Pulse Outputs (E+, E-)	
Type	Form A Solid-State Relay
Isolation	Optical
Pulse Width	80ms $\pm$ 20ms
Max. Load Voltage	50VDC
Max. Forward Current	50mA
Installation Torque	
Power Supply, Voltage/ Inputs, RS-485 and I/O	5lb-in (0.5N.m)
Environmental Conditions	
Operating Temp.	-25°C to 70°C
Storage Temp.	-40°C to 85°C
Humidity	5% to 95% non-condensing
Atmospheric Pressure	70 kPa to 106 kPa
Altitude	< 3000m
Pollution Degree	2
Mechanical Characteristics	
Panel Cutout	92x92mm (3.62"x3.62")
Unit Dimensions	96x96x92mm
IP Rating	IP65


Intelligent Multifunction Meter

Standards of Compliance


Safety Requirements	
CE LVD 2014 / 35 / EU	EN 61010-1: 2010 EN 61010-2-030: 2010
Electrical Safety in Low Voltage Distribution Systems up to 1000Vac and 1500 Vdc	IEC 61557-12: 2018 (PMD)
Insulation	IEC 62052-11: 2003 IEC 62053-22: 2003
AC Voltage: 2kV @ 1 minute Insulation Resistance: >100M Ω Impulse Voltage: 6kV, 1.2/50 μ s	
Electromagnetic Compatibility	
CE EMC Directive 2014 / 30 / EU (EN 61326: 2013)	
Immunity Tests	
Electrostatic Discharge	EN 61000-4-2: 2009
Radiated Fields	EN 61000-4-3: 2006 + A1: 2008 + A2: 2010
Fast Transients	EN 61000-4-4: 2012
Surges	EN 61000-4-5: 2014 + A1: 2017
Conducted Disturbances	EN 61000-4-6: 2014
Magnetic Fields	EN 61000-4-8: 2010
Voltage Dips and Interruptions	EN 61000-4-11: 2004 + A1: 2017
Ring Wave	EN 61000-4-12: 2017
Emission Tests	
Limits and Methods of Measurement of Electromagnetic Disturbance Characteristics of Industrial, Scientific and Medical (ISM) Radio-Frequency Equipment	EN 55011: 2016
Electromagnetic Compatibility of Multimedia Equipment - Emission Requirements	EN 55032: 2015
Limits for Harmonic Current Emissions for Equipment with Rated Current ≤ 16 A	EN 61000-3-2: 2014
Limitation of Voltage Fluctuations and Flicker in Low-Voltage Supply Systems for Equipment with Rated Current ≤ 16 A	EN 61000-3-3: 2013
Emission Standard for Industrial Environments	EN 61000-6-4: 2007 + A1: 2011
Mechanical Tests	
Spring Hammer Test	IEC 62052-11: 2003
Vibration Test	IEC 62052-11: 2003
Shock Test	IEC 62052-11: 2003

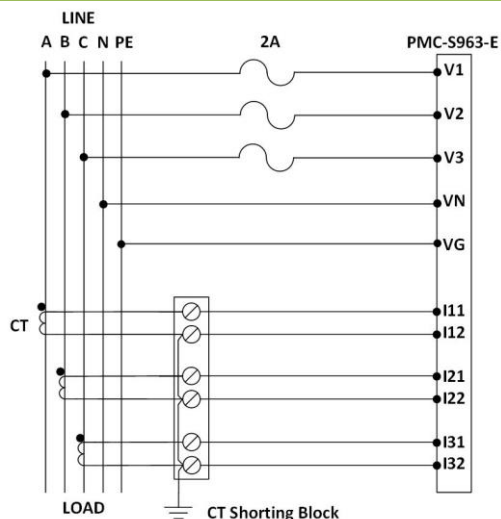

3P4W with 3CTs and no PTs

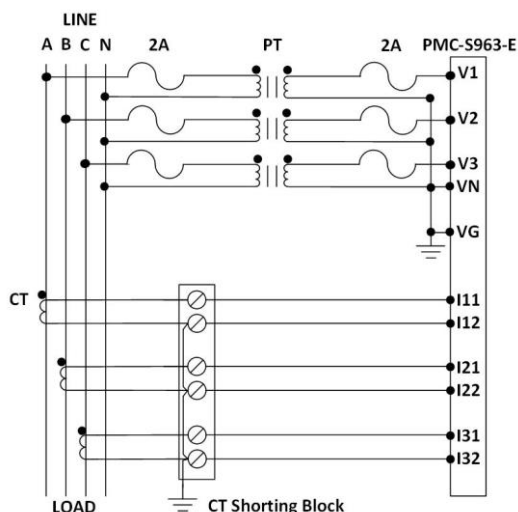


3P4W with 3CTs and 3PTs

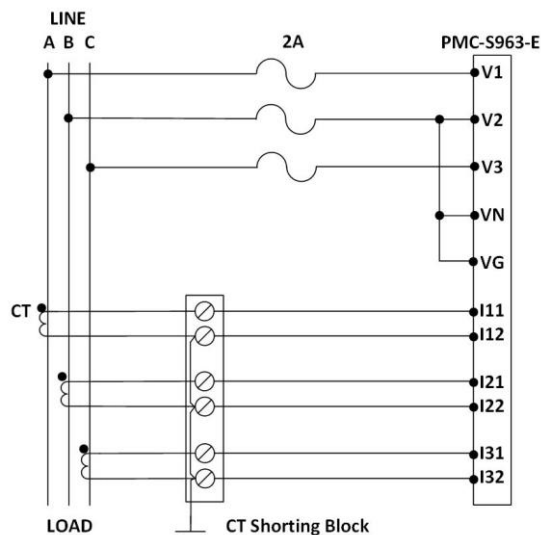

3P3W with 3CTs

Notes: PMC-S963-E does not support 3P3W connection with open Vn.

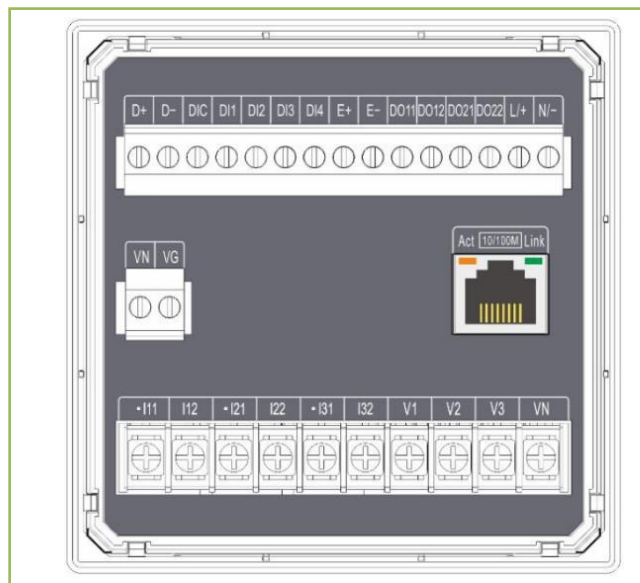

Ordering Information

Product Code		Description
PMC-S963		Intelligent Multifunction Meter
Basic Function		DIN96 Panel Mounting with 61x61mm Large 7-Segment LCD display, Multifunction Measurements, Demands, Multi-Tariff TOU, Harmonics up to 31 st order
Input Current		5 5A 1 1A
Input Voltage		3 240ULN/415ULL
Power Supply		2 95-250 VAC/DC, 47-440Hz
Frequency		5 45-65Hz
I/O		G 1xUng + 4xDI + 2xDO + 1xSS Pulse Output
Communication		E 1x10/100BaseT Ethernet Port + 1xRS-485
Language		E English
PMC-S963 - E 5 3 2 5 G E E		PMC-S963-E5325GEE (Standard Model)

Contact us

ECOXplore PTE LTD
120 LOWER DELTA ROAD
#12-15/16 CENDEX CENTRE
SINGAPORE 169208
TEL: (65) 6274 4840
FAX: (65) 6274 2939
EMAIL: sales@ecoxplore.com.sg

WWW.ECOXPLORE.COM