



PMC-350-C

3-Phase Wireless DIN Rail Energy Meter

3-Phase Wireless

Overview

PMC-350-C 3-Phase DIN Energy Meter is CET's latest offer for the wireless IoT energy metering market using the LoRaWAN technology for its Long-Range wireless communication capability. Housed in a standard DIN form factor measuring 72x70x95mm, it is perfectly suited for extremely space restricting environment. With a standard RS-485 port and Modbus RTU protocol support, IEC 62053-21 Class 1 compliance as well as optional support for LoRaWAN AS923-1/2/3/4, KR920 or EU868, it becomes a vital component of an intelligent, distributed and IoT based EMS. The PMC-350-C optionally provides 4xDI for Status Monitoring, 2xRO for Control and Alarming or 2xSS Pulse Outputs for Energy Pulsing as well as 4xRTD and 1xResidual Inputs for Temperature and Leakage Current measurements, respectively.

Typical Applications

- Industrial, Commercial and Utility Substation Metering
- Sub-metering and Cost Allocation
- Building, Factory and Process Automation
- Energy Management and Power Quality Monitoring
- LoRaWAN Class A/C at AS923-1/2/3/4, KR920 or EU868

Features Summary

Ease of use

- Easy installation with DIN Rail mounting, no tools required
- Support LoRaWAN Class C Node that offers the lowest latency for Server to End-Node communication
- Simple commissioning and low-deployment cost with Split-Core CT and wireless IoT communication

Basic Measurements

- ULN, ULL per Phase and Average
- Current per Phase and Average with calculated Neutral
- kW, kvar, kVA per Phase and Total
- PF per Phase and Total
- kWh, kvarh Import/Export/Net/Total and kVAh Total
- Frequency
- Device Operating Time (Running Hours)
- Optional Temperature and Residual Current Measurements
- Optional DI for Status Monitoring and Utility Pulse Counting

Enhanced Measurements

- U and I THD, TOHD, TEHD and Individual Harmonics up to 31st
- Current TDD, TDD Odd, TDD Even, K-Factor and Crest Factor
- U and I Unbalance and Phase Angle
- Fundamental kW and PF
- kvarh Q1-Q4
- Demands, Predicted Demands and Max. Demands for kW/kvar/kVA Total and per phase Current with Timestamp for This Month and Last Month (or Since Last Reset and Before Last Reset)


Setpoints

- 10 user programmable Setpoints with extensive list of monitoring parameters including Voltage, Current, Power and THD, etc.
- Configurable thresholds, time delays and DO triggers

Application

PMC-350-C Measurements:

Temperature & DI Status,
U, I, P, Q, S, Freq.,
PF, Unbalance,
Harmonics.

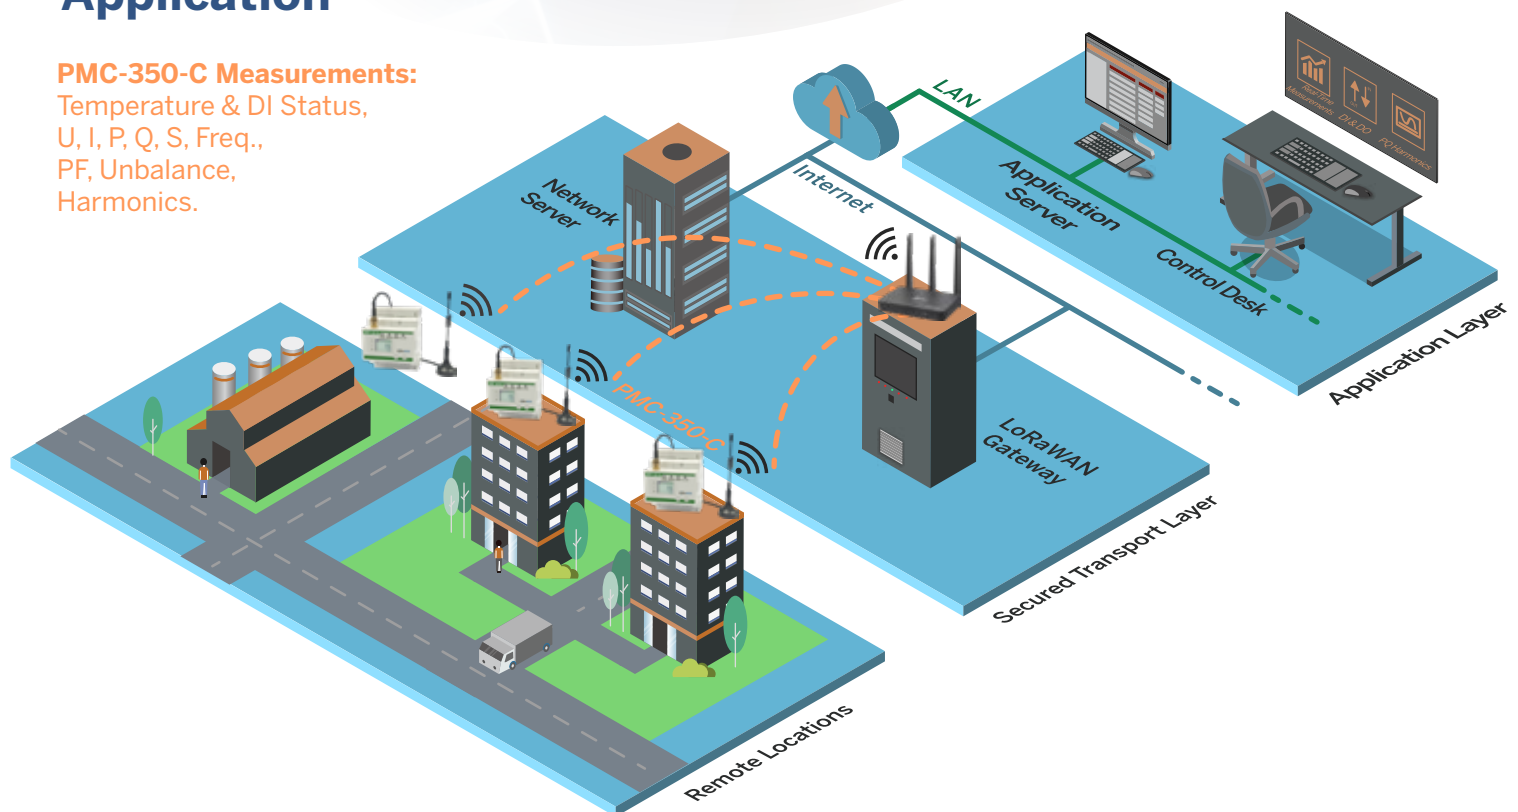

DIN Rail



Multi-Tariff TOU

- Two TOU schedules, each providing
 - 12 Seasons
 - 20 Daily Profiles, each with 12 Periods in 15-minute interval
 - 90 Holidays or Alternate Days
 - 8 Tariffs, each providing the following information
 - kWh/kvarh Import/Export, kVAh
 - kW/kvar/kVA Max. Demands

Max./Min. Log

- Max./Min. Log with Timestamp for Real-time measurements such as Voltage, Current, In, Freq., kW, kvar, kVA, PF, Unbalance, K-Factor, Crest Factor and THD
- Configurable for This Month & Last Month or Before & Since Last Reset

SOE Log

- 100 events time-stamped to ± 1 ms resolution
- Setup changes, Setpoint, DI status changes, DO operations, Clear Actions, Iresidual and Temperature Alarm, etc.

Monthly Energy Log

- 12 monthly recording of kWh, kvarh Import/Export/Total/Net, kVAh, kvarh Q1-Q4 as well as kWh/kvarh Import/Export and kVAh per Tariff

Daily/Monthly Freeze Log

- Daily/Monthly Log with Timestamps for kWh, kvarh, kVAh Total and Max. Demands for kW, kvar, kVA Total
- Available through Modbus and LoRaWAN communications for 60 Daily Freeze records (2 months) and 36 Monthly Freeze records (3 years)

Data Recorder

- 5 Data Recorders of 16 parameters each for Real-time measurements, Harmonics, Energy, Demand, TOU, Pulse Counters, etc.
- Recording interval from 1 minute to 40 days

Diagnostics

- Frequency Out-of-Range, Loss of Voltage/Current
- kW Direction per Phase and Total, Possible incorrect CT Polarity
- Incorrect U & I Phase Sequence

Communications

- Optically isolated RS-485 port at 1,200 to 38,400 bps
- Modbus RTU protocol
- Optional LoRaWAN support at AS923-1/2/3/4, KR920 or EU868

I/O Options

- 4xDI + 2xDO (Mechanical Relay)
- 4xDI + 2xSS Pulse Output
- 4xRTD + 1xResidual Inputs (PT100 sensor & Residual CT not included)

Autonomous Data Push with the LoRaWAN option

- DevEUI (End-Device Identifier), AppEUI (Application Identifier) and AppKey (AES-128 key) for OTAA activation
- User selectable Auto-Push Data Packages of Real-time measurements, Energy, Demands, Harmonics, Max./Min. Logs, Freeze Logs, I/O and Setpoint status can be autonomously pushed to the LoRaWAN Network Server in configurable interval

* Not all measurements are available via the wireless LoRaWAN option.

System Integration

- Supported by our PecStar® iEMS and PMC Setup
- Easy integration into other Automation or SCADA systems via Modbus RTU protocol or IoT based Energy Management System via LoRaWAN

Energy Meter

Accuracy

Parameters	Accuracy	Resolution
Voltage	± 0.5%	0.01V
Current	± 0.5%	0.001A
kW, kvar, kVA	± 1.0%	0.001kW/kvar/kVA
kWh	IEC62053-21: 2003 Class 1	0.01kWh
kvarh	IEC62053-23: 2003 Class 2	0.01kvarh
PF	± 1.0%	0.001
Frequency	± 0.02Hz	0.01Hz
In (Calculated)	± 1.0%	0.001A
THD	IEC61000-4-7 Class B	0.001%
Iresidual	± 1.0%	0.1mA
Temperature	± 1°C	0.1°C

Standards of Compliance

Safety Requirements	
CE LVD 2014/35/EU	EN61010-1: 2010 EN61010-2-030: 2010
Electrical Safety in Low Voltage Distribution Systems up to 1000Vac and 1500 Vdc	IEC61557-12: 2018 (PMD)
Insulation	IEC62052-11: 2003 IEC62053-22: 2003
AC Voltage: 2kV @ 1 minute Insulation Resistance: >100MΩ Impulse Voltage: 6kV, 1.2/50μs	

EMC Compatibility

CE EMC Directive 2014/30/EU (EN61326: 2013)

Immunity Tests	
Electrostatic Discharge	EN61000-4-2: 2009
Radiated Fields	EN61000-4-3: 2006+A1: 2008+A2: 2010
Fast Transients	EN61000-4-4: 2012
Surges	EN61000-4-5: 2014+A1: 2017
Conducted Disturbances	EN61000-4-6: 2014
Magnetic Fields	EN61000-4-8: 2010
Voltage Dips and Interruptions	EN61000-4-11: 2004+A1: 2017
Ring Wave	EN61000-4-12: 2017

Emission Tests	
Limits and Methods of Measurement of Electromagnetic Disturbance Characteristics of Industrial, Scientific and Medical (ISM) Radio-Frequency Equipment	EN55011: 2016
Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment	EN55032: 2015
Limits for Harmonic Current Emissions for Equipment with Rated Current ≤ 16 A	EN61000-3-2: 2014
Limitation of Voltage Fluctuations and Flicker in Low-Voltage Supply Systems for Equipment with Rated Current ≤ 16 A	EN61000-3-3: 2013
Emission Standard for Residential, Commercial and Light-Industrial Environments	EN61000-6-4: 2007+A1: 2011

Mechanical Tests	
Spring Hammer Test	IEC62052-11: 2003
Vibration Test	IEC62052-11: 2003
Shock Test	IEC62052-11: 2003

Environmental Conditions	
Operating Temp.	-25°C to +70°C
Storage Temp.	-40°C to +85°C
Humidity	5% to 95% non-condensing
Atmospheric pressure	70kPa to 106kPa
Pollution Degree	2

Technical Specifications

Voltage Inputs (V1, V2, V3, VN)	
Voltage (Un)	277ULN/480ULL
Range	90V to 1.2Un
Burden	<2W/phase
Frequency	45-65Hz

Current Inputs (I11, I12, I21, I22, I31, I32)		
	SCCT Option	SCCTA Option
Current (In)	40mA	2mA
Range	0.15%-100% In	0.1%-120% In
Starting Current	0.15% In	0.1% In
Burden	<0.25VA per phase	<0.25VA per phase
External SCCTs	100A/40mA	5A/2mA
	200A/40mA	
	400A/40mA	
	800A/40mA	
	1600A/40mA	

Power Supply (L+, N-)	
Standard	95-250VAC/DC, ±10%, 47-440Hz
Burden	<2W
Overvoltage Category	CAT III up to 300ULN

Optional Digital Inputs (DI1, DI2, DI3, DI4, DIC)	
Type	Dry contact, 24VDC internally wetted
Sampling	1000Hz
Hysteresis	1ms minimum

Optional Digital Outputs (DO11, DO12, DO21, DO22)	
Type	Form A Mechanical Relay
Loading	5A @ 250VAC or 30VDC

Optional RTD Temperature Inputs (TC1, TC2, TC3, TC4)	
RTD Type	2-Wire PT100 (sensor not included)
PT100	-40°C to +200°C
Alarm Range	+45°C to +140°C

Optional Residual Current Inputs (-IR, IR)	
Range	20mA-2000mA

Communications		
RS-485 (Standard)	Protocol	Modbus RTU
	Baud Rate	1200/2400/4800/9600/19200/38400 bps
LoRaWAN (Optional)	LoRaWAN™ Specification 1.0.2 Class A/C Compliance	
ISM Bands (Optional)	Applicable to the following Regions:	
	AS923-1	Australia, New Zealand, Malaysia, Hong Kong, Singapore, Taiwan, Thailand, Cambodia, etc.
	AS923-2	Vietnam, Indonesia
	AS923-3	Denmark, Norway, Saudi Arabia, etc.
	AS923-4	Israel
	EU868	Europe, United Arab Emirates, etc.
	KR920	South Korea

Optional Solid State Energy Pulse Output (E1+, E1-, E2+, E2-) Selectable kWh/kvarh	
Pulse Constant	10/100/1000/3200 imp/kxh
Isolation	Optical
Max. Load Voltage	80V
Max. Forward Current	50mA
Pulse Width	80 ± 20ms

Mechanical Characteristics	
Unit Dimensions	72x70x95mm
Mounting	DIN Rail or optional Panel Mout
Panel Cutout	78x67mm
IP Rating	IP30

Ordering Information

Product Code										Description		
PMC-350 3-Phase LoRaWAN DIN Energy Meter												
Basic Function		C								Multifunction Measurements, LCD Display, 1xRS-485		
Input Current			SCCT								40mA Input for use with 100A/40mA, 200A/40mA, 400A/40mA, 800A/40mA or 1600A/40mA SCCTs (SCCTs not included)	
			SCCTA								2mA Input for use with 5A/2mA SCCT (SCCTs not included)	
Input Voltage				5							277ULN/480ULL + 20% (1P2W ULN, 1P2W ULL, 1P3W, 3P3W, 3P4W, Demo)	
Power Supply					2						95-250 VAC/VDC, 47-440Hz	
Frequency						5					45-65Hz	
Expansion 1*							N			None		
							A			4xDI + 2xDO (Mechanical Relay)		
							B			4xDI + 2xSS Pulse Outputs		
Expansion 2*								N			None	
								T			4xRTD + 1xResidual Input	
Expansion Communication*									N	None		
									1	LoRaWAN @ EU868 with External Antenna		
									6	LoRaWAN @ AS923-1/2/3/4 with Internal Antenna		
									7	LoRaWAN @ AS923-1/2/3/4 with External Antenna		
									9	LoRaWAN @ KR920 with External Antenna		
Language										E	English	
PMC-350	-	C	SCCT	5	2	5	N	N	7	E	PMC-350-CSCCT525NN7E (Standard Model)	

* Additional charges apply.

Accessories

External Split Core CTs

Part Number	Specification	Accuracy	Aperture	Cable Length	
PMC-SCCT-5A-2mA-16-A	5A/2mA, 1-phase Split-Core CT with Pluggable Connector	2.0	Ø16mm	2m	
PMC-SCCT-100A-40mA-16-A	100A, 1-phase Split-Core CT with Pluggable Connector	0.5	Ø16mm	2m	
PMC-SCCT-200A-40mA-24-A	200A, 1-phase Split-Core CT with Pluggable Connector	0.5	Ø24mm	2m	
PMC-SCCT-400A-40mA-35-A	400A, 1-phase Split-Core CT with Pluggable Connector	0.5	Ø35mm	2m	
PMC-SCCT-800A-40mA-A	800A, 1-phase Split-Core CT	0.5	80x50mm	2m	
PMC-SCCT-1600A-40mA-A	1600A, 1-phase Split-Core CT	0.5	130x55mm	2m	


Product Name	Part Number	Specification
Cable for 800A/1600A Split-Core CT	PMC-BCC-350-2	2m with 2-Pin Black Pluggable Connector for 800A and 1600A SCCTs
DIN Panel Mounting Adapter	PMC-PMA-4	Panel Mounting Adapter for 4P DIN Rail Mounting devices

1) Please refer to Cable Length for details and contact the factory in advance for special requirements.


2) One PMC-350-C can be equipped with 3 pcs of SCCT.

Dimensions

Unit: mm

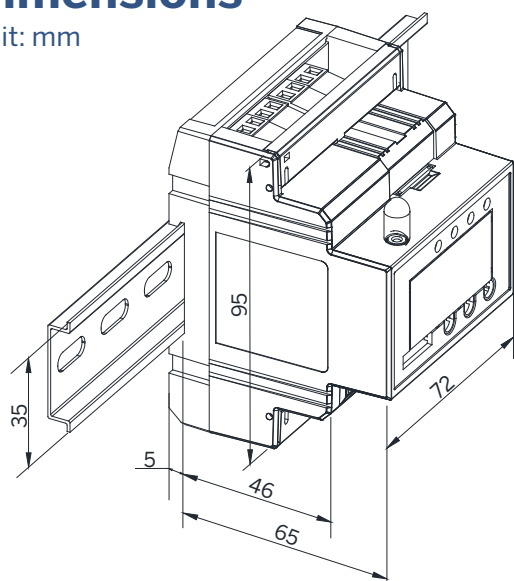

DIN-Rail Installation

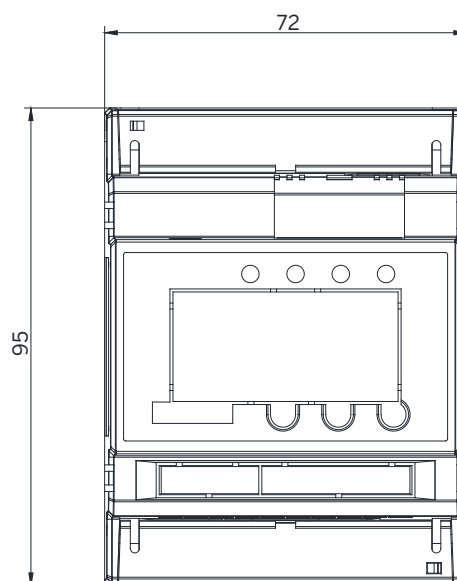

Front View



Contact Us



ECOXPLORE PTE LTD

120 LOWER DELTA ROAD
#12-15/16 CENDEX CENTRE

SINGAPORE 169208

TEL: (65) 6274 4840

FAX: (65) 6274 2939

EMAIL: SALES@ECOXPLORE.COM.SG

WWW.ECOXPLORE.COM